

Industries & Applications



Features & Benefits

- ▶ **AC or DC operation** enables use in a wide range of applications.
- ▶ **115% boost power capability** increases design flexibility and enable system retrofits.
- ▶ **Efficiencies of up to 95.1%** contribute to minimised energy consumption and an environmentally friendly energy footprint.
- ▶ **A peak inrush energy less than 0.6A²s** prevents input circuit breakers from nuisance tripping.
- ▶ **Push-in terminals** for tool-less installation and high vibration resistance.
- ▶ **Dedicated models with coated PCBs** to withstand harsh environments.



Technical data abstract¹

Output voltage	nom.	24V _{DC}
Adjustment range	nom.	22.5 .. 29V _{DC}
Output current	nom.	20A
Boost current	max.	23A
Hold-up time	min.	23ms
Overload behaviour		CC + Intermittent mode (Hiccup)
Input voltage AC	nom. max.	100 .. 240V _{AC} 90 .. 264V _{AC}
Frequency range	max.	47 .. 63Hz
Inrush current AC ²	typ.	9 / 11 / 20A <4ms
Inrush energy AC ²	typ.	0.10 / 0.15 / 0.40A ² s
Input voltage DC	nom. max.	110 .. 250V _{DC} 93 .. 300V _{DC}
Inrush current DC ³	typ.	8A <15ms / 15A <12ms
Inrush energy DC ³	typ.	0.25 / 0.80A ² s
Output power	nom.	480W
Boost power	max.	552W / 200s
Conversion efficiency ²	typ.	92.0 / 93.3 / 95.1%
Power losses ²	typ.	41.7 / 34.5 / 24.7W
No-load consumption ²	max.	1.7 / 1.7 / 1.6W
Power factor	typ.	0.95
Ambient operating temperature	nom. max.	-25 .. +55°C _{amb} (-13 .. +158°F _{amb}) -25 .. +70°C _{amb} (-13 .. +131°F _{amb})
Service life MTBF ⁴	min.	7.73M / 1.17M hrs
Service lifetime ²	min.	44 000 / 87 000 / 183 000hrs
Dimensions (WxHxD)		60x125x129mm (2.35x4.92x5.08in)
Weight	max.	900g (1.98lb)

¹All values refer to STC unless otherwise stated | ² 100 / 120 / 240V_{AC}, 25°C_{amb} | ³ 110 / 250V_{DC}, 25°C_{amb} | ⁴ 50% / 100% P_{out, nom}

Certifications & Approvals



IEC EN 61010-1
IEC EN 61010-2-201
IEC EN 62368-1 (Ed.3)



UL CSA 61010-1
UL CSA 61010-2-201
E356563



UL CSA 62368-1 (Ed.3)
E511889



IS 13252-1
R-41185469

Compliance & Registration



EU Low Voltage Dir. 2014/35/EU
EU EMC Dir. 2014/30/EU
EU RoHS Dir. 2011/65/EU



Safety and EMC Reg. 2016
Hazard. Substances Reg. 2012



China RoHS Law SJ/T 11363-2006

www.emea.lambda.tdk.com/d1se-series

DS000055B02_D1SE480-24-Ax | 16-07-25

Commercial information

Order codes	D1SE480-24-A3 D1SE480-24-A4 D1SE480-24-A5
HS code	8504408390
Life-cycle status	Launch
Product revision	P07
Single package	
Width	179mm (7.05in)
Height	101mm (3.98in)
Depth	145mm (5.71in)
Gross weight	1030g (2.27lb)
Bulk package	
Width	310mm (5.71in)
Height	203mm (7.99in)
Depth	540mm (21.26in)
Quantity	10 units
Pallet	
Width	1020mm (40.16in)
Length	1090mm (42.91in)
Quantity	240 units
Manufacturer warranty	3 years

Model selector

Model name	Output Power	Output Voltage	Feature
D1SE120-24-A3	120W	24V _{DC}	
D1SE120-24-A4	120W	24V _{DC}	DC OK
D1SE120-24-A5	120W	24V _{DC}	DC OK, PCB coating
D1SE240-24-A3	240W	24V _{DC}	
D1SE240-24-A4	240W	24V _{DC}	DC OK
D1SE240-24-A5	240W	24V _{DC}	DC OK, PCB coating
D1SE480-24-A3	480W	24V _{DC}	
D1SE480-24-A4	480W	24V _{DC}	DC OK
D1SE480-24-A5	480W	24V _{DC}	DC OK, PCB coating

DS000055B02_D1SE480-24-Ax | 16-07-25

www.emea.lambda.tdk.com/d1se-series

DUSH DC-UPS

In mission critical applications, the DUSH serves as a backup solution to deliver power from a battery.



DUSH960-1248-0M

20A input/output/battery, 12..48V programmable, buck-boost converter, battery interface, Modbus/RTU, LCD, 5A AUX output, push-in terminals

DUSH960-1248-1M

20A input/output/battery, 12..48V programmable, buck-boost converter, battery interface, Modbus/RTU, LED indication, push-in terminals

www.emea.lambda.tdk.com/uk/products/dush

DBM Buffer Modules

In order to secure process uptime and reliability in 24V low-voltage systems, DBM buffer modules increase hold-up time or provide a reserve for peak loads.



DBM20

Buffer module, input/output 20A, electrolytic capacitors, signalling & control, screw terminals

DBM20/E

Buffer module, input/output 20A, electrolytic capacitors, signalling & control, spring terminal blocks

www.emea.lambda.tdk.com/uk/products/dbm20

DRM Redundancy Modules

For building fault tolerant 12/24V systems, DRM redundancy modules can be used to decouple n+1 power supplies.



DRM40

40A output, 2x20A input, screw terminals, DC OK and balancing LEDs

DRM40B

40A output, 2x20A input, screw terminals

www.emea.lambda.tdk.com/uk/products/drm40

DDA DC/DC Converters

Non-isolated step-down converters for creating additional DC bus voltages from a single DC input source.



DDA250N

Single output 20A at 3.3 .. 15V, input 9 .. 53V, DC OK LED, screw terminals

DDA325N

Dual output 14A at 3.3 .. 24V and 8A at -3.3 .. -24V, input 9 .. 40V, DC OK LEDs, screw terminals

DDA500N

Dual output 2x20A at 3.3 .. 15V, input 9 .. 53V, DC OK LEDs, screw terminals

www.emea.lambda.tdk.com/uk/products/dda

1.	General	6
1.1	Description of user elements	6
2.	Electrical output	7
3.	Electrical input AC	8
4.	Electrical input DC	9
5.	Performance	10
6.	Ambient conditions	11
6.1	Flowing mixed gases	13
6.2	Salt mist	13
7.	Reliability and Service lifetime	14
8.	Dimensions & Mechanical data	15
9.	Installation clearances	16
10.	Wiring & Connection	16
11.	Signaling & Control	17
12.	Block diagram	17
13.	Device protection	18
14.	Electrical Safety	18
14.1	Overvoltage category design	18
14.2	Insulation strength.....	19
14.3	HIPOT test	19
15.	Electromagnetic immunity	20
16.	Electromagnetic emission	21
17.	Certifications & Approvals	22
18.	Designed to meet	22
19.	Compliance & Registration	23
20.	Application notes	23
20.1	Parallel operation	23
20.2	Series operation.....	24

List of abbreviations

avg.	<i>average</i>	The arithmetic average calculated from a row of values.
CC		Constant output current
CGD		Corner grounded delta (AC power system)
chap.		Chapter
Dir.		Directive
eCap		Electrolytic capacitor
EMC		Electromagnetic Compatibility
ES		Electrical Energy Source
HIPOT		High Potential Test
I _{ac}		AC input current under a particular operating condition
I _{out}		DC output current under a particular operating condition
I _{out_boost}		Available current reserve beyond I _{out_nom} (w/o a drop in U _{set}) that can be delivered for a limited time.
I _{out_nom}		Continuous nominal DC output current under STC.
I _{out_ol}		Max. intermittent DC output current in an overload situation and a shortfall of U _{set} .
I _{out_sc}		Max. short circuit DC output current and U _{out} close to zero.
ITU		International Telecommunication Union
max.	<i>maximum</i>	The maximum value which a parameter can assume, or which must not be exceeded.
MCB		Miniature circuit breaker
min.	<i>minimum</i>	The minimum value which a parameter can assume, or must not be fallen below.
MOV		Metal Oxide Varistor
MTBF		Mean Time Between Failure
nom.	<i>nominal</i>	The ideal or reference value of a technical parameter which is guaranteed under STC. All nominal values in this document refer to each other and represent the general specification of the device.
OCP		Overcurrent protection
OTP		Overtemperature protection
OVP		Overvoltage protection
PCB		Printed Circuit Board
PELV		Protective Extra Low Voltage
PE		Protective Earth
PFC		Power Factor Correction
P _{out}		Output power under a particular operating condition with reference to P _{out_nom}
P _{out_boost}		Available power reserve beyond P _{out_nom} that can be delivered for a limited time.
P _{out_nom}		Nominal output power
PSU		Power supply unit
Reg.		Regulation
SELV		Safety Extra Low Voltage
STC		Standard test conditions (see „1. General“ on page 6)
typ.	<i>typical</i>	The typical value of a parameter is not guaranteed but can be assumed under STC. The min. or max. value must be determined during the engineering process of the end application.
U _{out}		DC output voltage under a particular operating condition
U _{out_nom}		Nominal DC output voltage
U _{set}		Manually set output voltage via voltage potentiometer
UVP		Undervoltage protection
V _{ac}		AC input voltage under a particular operating condition
V _{ac_nom}		Nominal AC input voltage
/		Separator between two values. The conditions to which the values refer can be found in the last column of the table.
..		Specifies a range of values.
<		The parameter is less than or equal to the specified value
>		The parameter is greater than or equal to the specified value

Table data structure

X. Technical category

Technical parameter	Characteristic (optional)	Values	Condition (optional)
---------------------	---------------------------	--------	----------------------

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

5 / 25

1. General

Proper handling of the product

The faultless and safe operation of the products requires proper transport, proper storage, set-up, assembly, installation, commissioning, operation and maintenance. The permissible ambient conditions must be observed. Instructions in the associated documentation must be observed.

Protection enclosure required

The device must be installed in a protective housing or control cabinet to which only qualified personnel have access.

Humid environments

Do not operate the device in a damp environment or in an environment where condensation is likely to occur.

Switch or circuit-breaker mounting position

A switch or circuit-breaker must be mounted near the equipment.

Observe country-specific regulations

In addition to the product documentation, the relevant country-specific regulations for the installation of the device must be observed.

Prohibited electrical/mechanical modifications

The product must not be modified in any way electrically or mechanically. Modifications can result in fatal injuries and damage to property.

Expiry of the manufacturer's warranty

The power supply is maintenance-free. Repairs can only be carried out by the manufacturer. Opening the housing voids the manufacturer's warranty.

Use of third-party products

If third-party products and components are used for power or voltage increase, buffering (primary or secondary side), EMC filtering, redundancy or for load protection, it must be approved by TDK-Lambda.

Standard test conditions

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (131°F) ambient temperature and a run-in time of 5 minutes.

1.1 Description of user elements

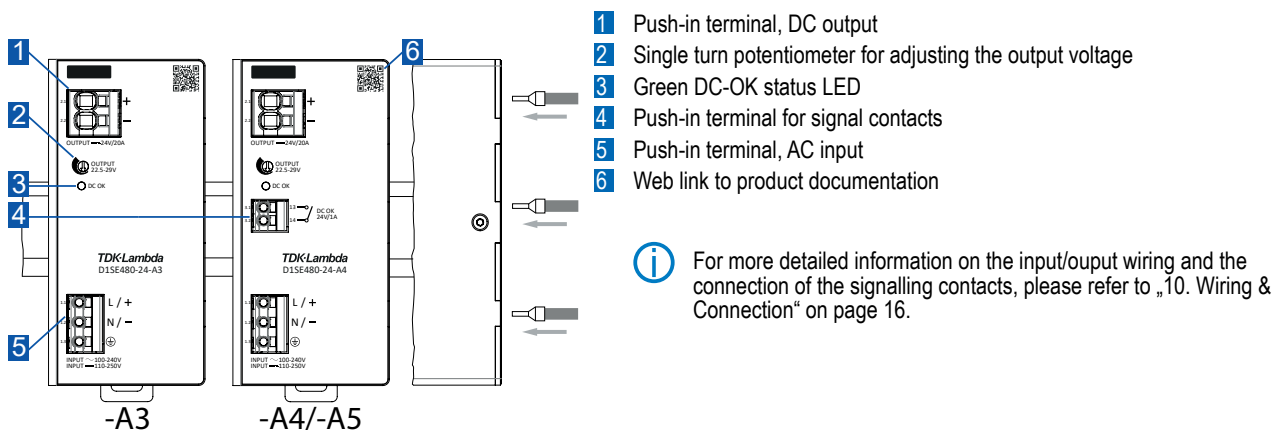


Fig. 1: Description of user elements

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

| 6 / 25

2. Electrical output

Output voltage [U _{out_nom}]	nom.	24V _{DC}	
Adjustment range [U _{set}]	nom.	22.5 .. 29V _{DC}	
Adjustment tolerance	max.	±3%	at upper/lower end position of voltage potentiometer
Factory default		24V _{DC} (±0.1%)	
Output current [I _{out_nom}]	nom.	20A	
Boost current [I _{out_boost}]	max.	23A / 200s	> 108V _{AC} , <55°C _{amb}
Overload behaviour		Constant current + Intermittent mode (Hiccup)	see Fig. 3
Short-circuit proof		Yes, auto-recovery	
Instant SC current [I _{out_sc}]	max.	90A <1ms	
SC hiccup current	max. avg.	50A / 50ms 11.8A / 10s	
Start-up delay	typ.	0.9s	
Rise time	typ.	6.5ms 14ms	0% P _{out_nom} 100% P _{out_nom} , resistive load
Voltage overshoot	typ.	0.05V _{DC}	
Fall time	typ.	49ms	
Hold-up time	min.	23ms	100 .. 240V _{AC}
Output capacitance	max.	7670μF	
Capacitive load start-up	max.	20 000μF	22.5 .. 29V _{DC}
Feedback voltage	max.	33V _{DC}	
Feedback energy	max.	1.967J	
Return current	max.	63mA	OFF mode
Line regulation	max.	0.02%	90 .. 264V _{AC}
Load regulation	max.	0.55%	90 .. 264V _{AC}
Dynamic response	typ.	820mV _{pp}	90 .. 264V _{AC} , 10 .. 100% P _{out_nom} , transient frequency 10Hz
Ripple & noise voltage*	max. max.	20mV _{pp} 25mV _{pp}	90 .. 264V _{AC} , +25 .. +70°C _{amb} 90 .. 264V _{AC} , -25 .. +25°C _{amb}

*The measurement was performed with a short twisted pair cable using a 120μF eCap and a 0.1μF cCap connected in parallel. A bandwidth limit of 20MHz is required.

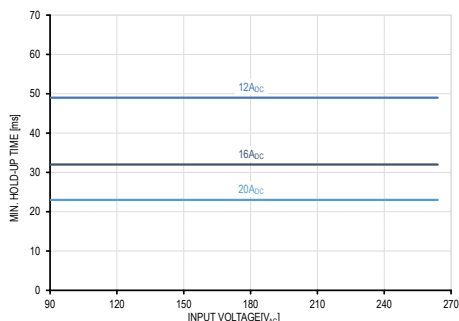


Fig. 2: Hold-up times under different load conditions and in dependence of the input voltage

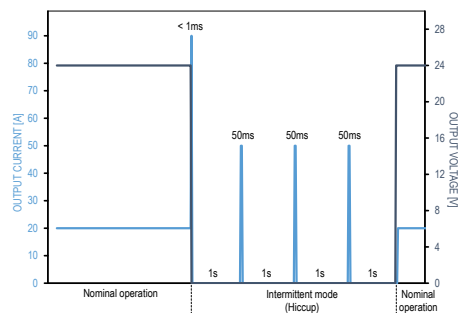


Fig. 3: Output current and timing during short-circuit and intermittent mode (Hiccup)

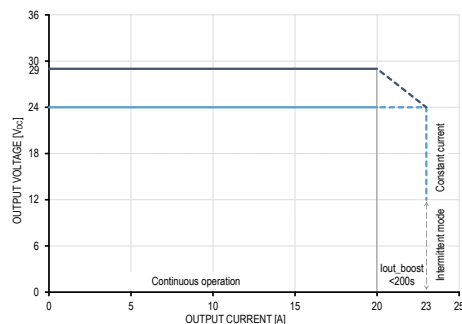


Fig. 4: Boost current capability up to 55°C_{amb}

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

7 / 25

3. Electrical input AC

AC power systems		TT, TN, IT, CGD	
Input voltage [U _{in_nom}]	nom.	100 .. 240V _{AC}	1AC, N, PE
Input voltage [U _{in_max}]	max.	90 .. 264V _{AC}	
Withstand voltage	max.	300V _{AC} / 30s	
Mains frequency	nom.	50/60Hz	
Frequency range	max.	47 .. 63Hz	
Input current	max.	1.5A	
Input current RMS	typ.	1.5A	100V _{AC}
	typ.	1.2A	120V _{AC}
	typ.	0.7A	240V _{AC}
Crest factor	typ.	1.8	100V _{AC}
	typ.	1.7	120V _{AC}
	typ.	2.0	240V _{AC}
Turn-ON voltage	typ.	80V _{AC}	
Turn-OFF voltage	typ.	80V _{AC}	
Input capacitance	max.	1.4μF	
Inrush current	typ.	15A <4ms	100V _{AC} , 25°C _{amb} , cold start
	typ.	19A <4ms	120V _{AC} , 25°C _{amb} , cold start
	typ.	29A <4ms	240V _{AC} , 25°C _{amb} , cold start
Inrush energy	typ.	0.07A²s	100V _{AC} , 25°C _{amb} , cold start
	typ.	0.12A²s	120V _{AC} , 25°C _{amb} , cold start
	typ.	0.30A²s	240V _{AC} , 25°C _{amb} , cold start

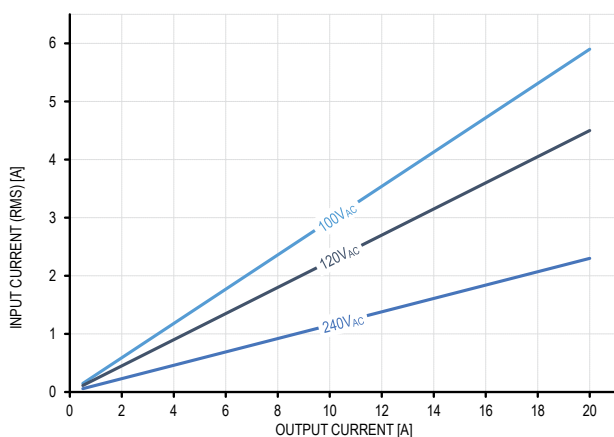


Fig. 5: Typical input current per phase in dependence of the load current

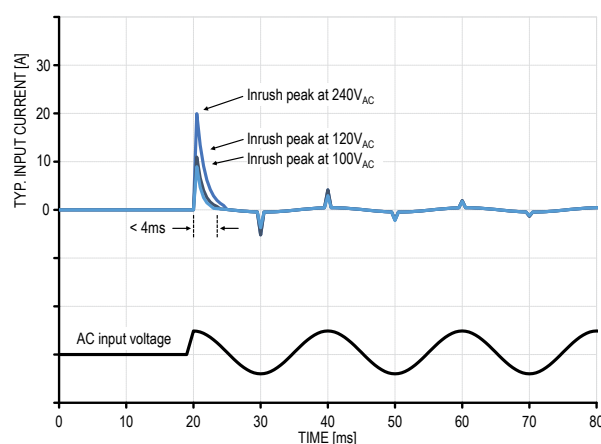


Fig. 6: Inrush current and energy during start-up phase

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

8 / 25

HELIOS
POWER SOLUTIONS

heliosps.com

Australia
sales-au@heliosps.com
+61 2 7200 9200

New Zealand
sales-nz@heliosps.com
+64 9 835 0700

Specifications subject to change.

Asia
sales@heliosps.asia
+65 6871 4140

Middle East
sales@heliosps.asia
+971 4 401 8484

4. Electrical input DC

Input voltage	<i>nom.</i> 110 .. 250V _{DC} <i>max.</i> 93 .. 300V _{DC}	external DC fuse required, see "Device protection" on page 18
Withstand voltage	<i>max.</i> 420V _{DC} / 30s	
Input current	<i>max.</i> 3A	
Turn-ON voltage	<i>min.</i> 105V _{DC}	
Turn-OFF voltage	<i>max.</i> 60V _{DC}	
Inrush current	<i>typ.</i> 8A <15ms <i>typ.</i> 15A <12ms	110V _{DC} , 25°C _{amb} , cold start 250V _{DC} , 25°C _{amb} , cold start
Inrush energy	<i>typ.</i> 0.25A ² s <i>typ.</i> 0.80A ² s	110V _{DC} , 25°C _{amb} , cold start 250V _{DC} , 25°C _{amb} , cold start

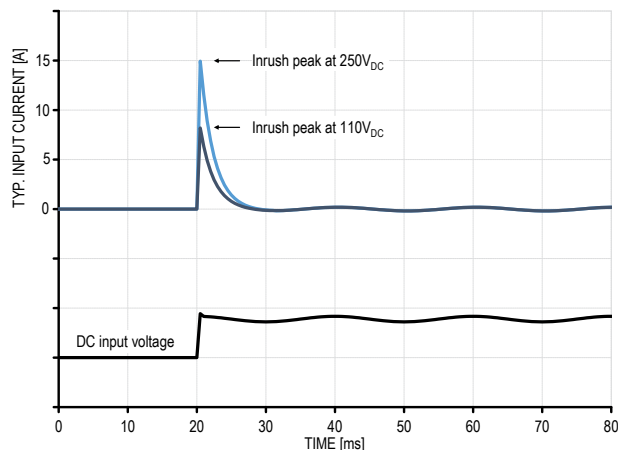


Fig. 7: DC inrush current and energy during start-up phase

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

9 / 25

HELIOS
POWER SOLUTIONS

heliosps.com

Australia
sales-au@heliosps.com
+61 2 7200 9200

New Zealand
sales-nz@heliosps.com
+64 9 835 0700

Specifications subject to change.

Asia
sales@heliosps.asia
+65 6871 4140

Middle East
sales@heliosps.asia
+971 4 401 8484

5. Performance

Output power [P _{out_nom}]	nom.	480W	
Boost power [P _{out_boost}]	max.	552W / 200s	>108V _{AC} , <55°C _{amb} <108V _{AC} , <45°C _{amb}
Duty cycle	max.	0.037	108 .. 264V _{AC} , 55°C _{amb}
Power factor	typ.	0.95	
Active input power	typ.	521.7W	100V _{AC}
	typ.	514.5W	120V _{AC}
	typ.	504.7W	240V _{AC}
Reactive input power	typ.	171.5Var	100V _{AC}
	typ.	169.1Var	120V _{AC}
	typ.	165.9Var	240V _{AC}
Apparent input power	typ.	549.2VA	100V _{AC}
	typ.	541.5VA	120V _{AC}
	typ.	531.3VA	240V _{AC}
Conversion efficiency	typ.	92.0%	100V _{AC} , 100% P _{out_nom}
	typ.	93.3%	120V _{AC} , 100% P _{out_nom}
	typ.	95.1%	240V _{AC} , 100% P _{out_nom}
	avg.	91.9%	100V _{AC} , 25..100% P _{out_nom}
	avg.	93.0%	120V _{AC} , 25..100% P _{out_nom}
	avg.	94.3%	240V _{AC} , 25..100% P _{out_nom}
Power losses	typ.	41.7W	100V _{AC} , 100% P _{out_nom}
	typ.	34.5W	120V _{AC} , 100% P _{out_nom}
	typ.	24.7W	240V _{AC} , 100% P _{out_nom}
	avg.	42.3W	100V _{AC} , 25..100% P _{out_nom}
	avg.	36.1W	120V _{AC} , 25..100% P _{out_nom}
	avg.	29.0W	240V _{AC} , 25..100% P _{out_nom}
No-load consumption	max.	1.7W	100V _{AC} , 0% P _{out_nom}
	max.	1.7W	120V _{AC} , 0% P _{out_nom}
	max.	1.6W	240V _{AC} , 0% P _{out_nom}

*Average efficiency under 25%, 50%, 75% and 100% load conditions, according to eco-design requirements of EU commission regulation 2019/1782.

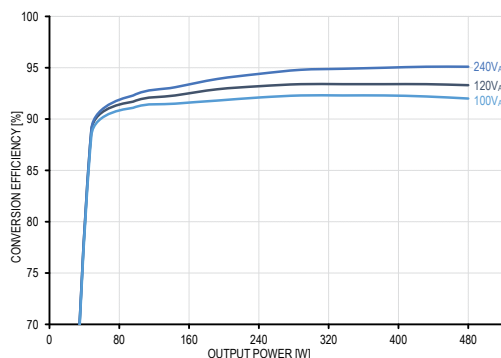


Fig. 8: Conversion efficiency in dependence of the output power

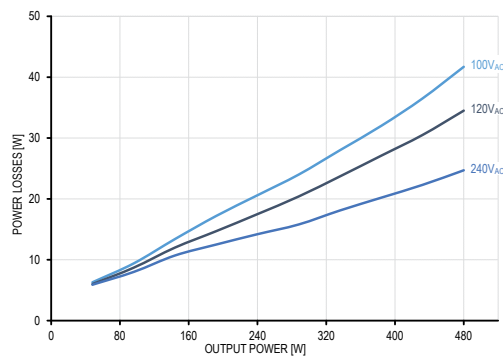


Fig. 9: Power losses in dependence of the output power

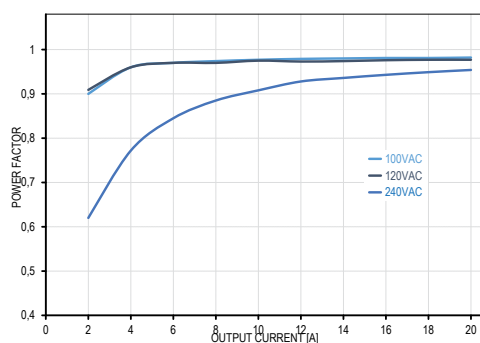


Fig. 10: Power factor in dependence of the output current

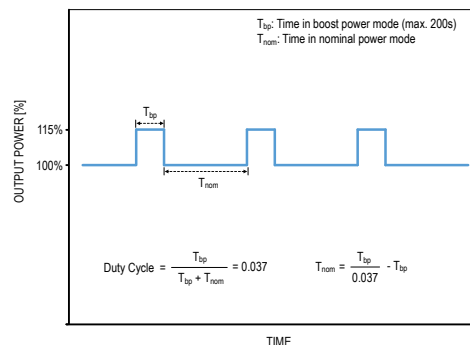


Fig. 11: Period and frequency of use of boost power at 55°C_{amb} in normal mounting position

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

| 10 / 25

6. Ambient conditions

Ambient operating temperature	<i>nom.</i> -25 .. +55°C _{amb} (-13 .. +131°F _{amb}) <i>nom.</i> -25 .. +45°C _{amb} (-13 .. +113°F _{amb}) <i>max.</i> -25 .. +70°C _{amb} (-13 .. +158°F _{amb})	normal mounting position. >108V _{AC} normal mounting position. <108V _{AC}
Start-up temperature	<i>max.</i> -40°C (-40°F)	
Ambient storage temperature	<i>max.</i> -40 .. +85°C _{amb} (-40 .. +185°F _{amb})	
Power derating*	<i>min.</i> 12.0W/°C _{amb} (6.67W/°F _{amb}) <i>min.</i> 13.4W/°C _{amb} (8.89W/°F _{amb}) <i>min.</i> 9.6W/°C _{amb} (5.33W/°F _{amb}) <i>min.</i> 8.0W/°C _{amb} (4.44W/°F _{amb}) <i>min.</i> 9.6W/°C _{amb} (5.33W/°F _{amb}) <i>min.</i> 6.0W/°C _{amb} (3.33W/°F _{amb})	120V _{AC} , >55°C _{amb} (131°F _{amb}) 120V _{AC} , >55°C _{amb} (131°F _{amb}), 90° rotated 120V _{AC} , >55°C _{amb} (131°F _{amb}), 180° rotated 240V _{AC} , >55°C _{amb} (131°F _{amb}) 240V _{AC} , >55°C _{amb} (131°F _{amb}), 90° rotated 240V _{AC} , >55°C _{amb} (131°F _{amb}), 180° rotated
Cooling concept	Natural convection	
Relative storage humidity IEC 60068-2-30	<i>max.</i> 95%	non-condensing
Relative operation humidity IEC 60068-2-30	<i>max.</i> 95%	non-condensing
Operating altitude	<i>nom.</i> 3000mASL (9842ftASL) <i>max.</i> 6000mASL (19685ftASL)	not UL approved, reduced OVC
Percentage power derating	<i>min.</i> 5% per 1000m (3281ft)	>3000mASL (>9842ftASL)
Temperature derating	<i>min.</i> 5K per 1000m (9K per 2181ft)	>3000mASL (>9842ftASL)
Atmospheric pressure	<i>nom.</i> 689hPa <i>max.</i> 469 .. 1070hPa	
Pollution degree	2	
Vibration sinusoidal IEC 60068-2-6	2g / 10 .. 500Hz, 1 hour/direction X,Y,Z	mounted on DIN rail
Shock test sinusoidal halfwave IEC 60068-2-27	30g / 11ms ±5ms, 3 bumps/direction, 9 bumps total	mounted on DIN rail
Audible noise	Some audible noises may be heard during no load, overload or short circuit.	

*Not actively controlled

i For altitudes above 3000mASL (9842ftASL) the next lower OVC must be considered.

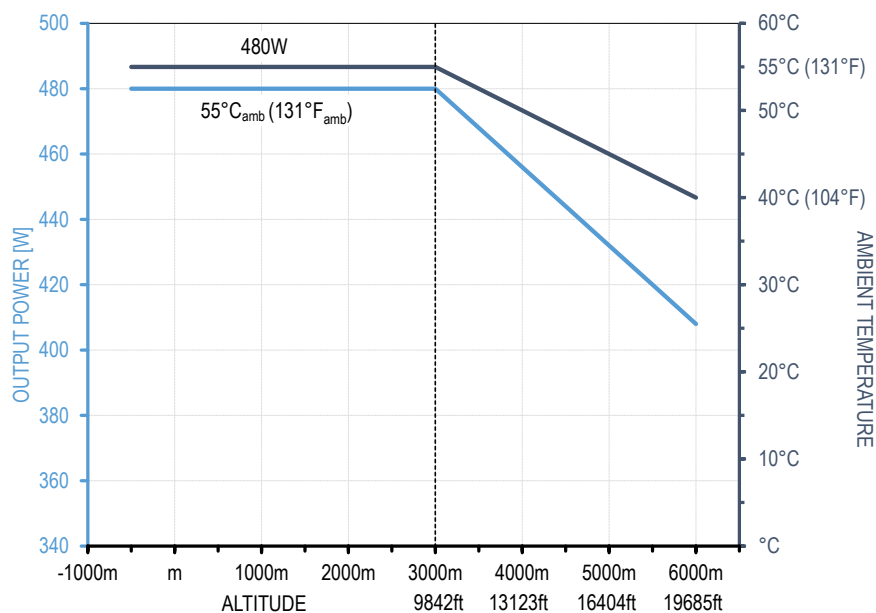


Fig. 12: Output power and ambient temperature derating at increasing altitudes

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

| 11 / 25

HELIOS
POWER SOLUTIONS

heliosps.com

Australia
sales-au@heliosps.com
+61 2 7200 9200

New Zealand
sales-nz@heliosps.com
+64 9 835 0700

Specifications subject to change.

Asia
sales@heliosps.asia
+65 6871 4140

Middle East
sales@heliosps.asia
+971 4 401 8484



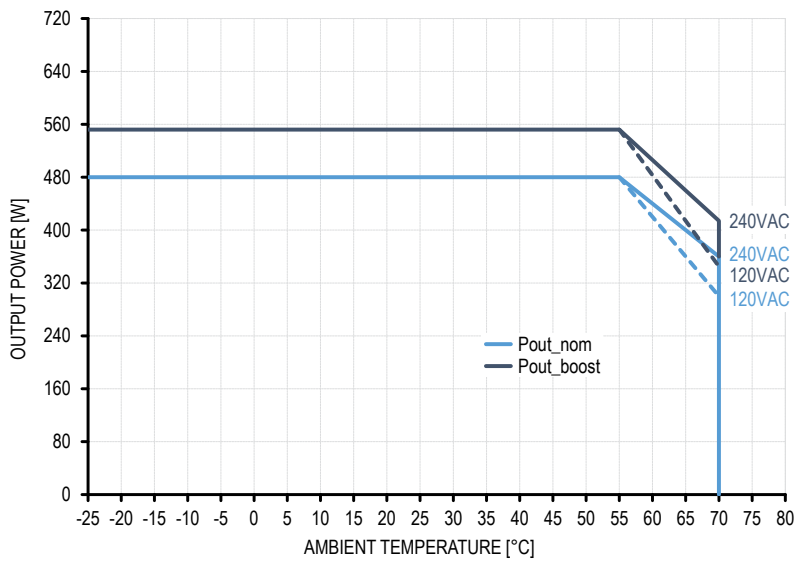


Fig. 13: Available output power in dependence of the ambient temperature for normal mounting positions


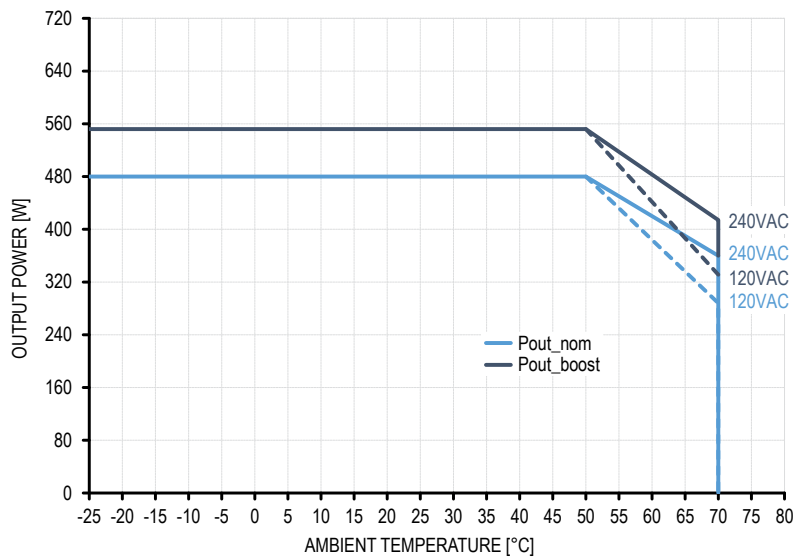


Fig. 14: Available output power in dependence of the ambient temperature for 180° rotated mounting positions

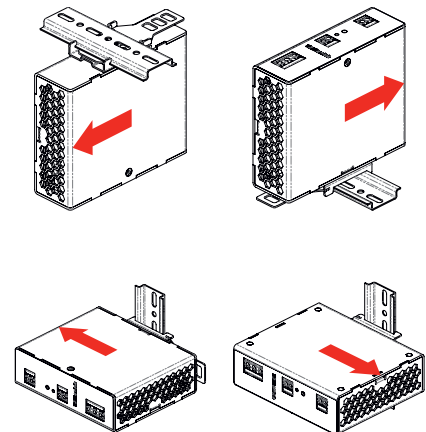
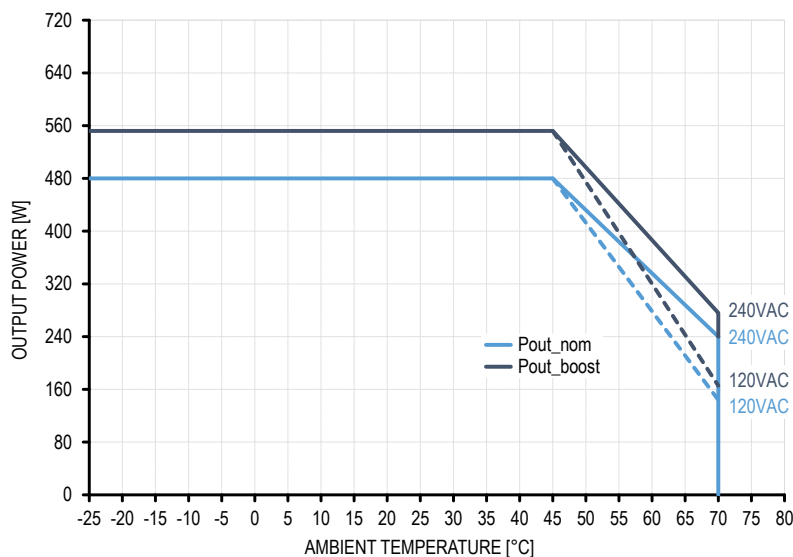


Fig. 15: Available output power in dependence of the ambient temperature for 90° rotated mounting position

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

| 12 / 25

6.1 Flowing mixed gases

The power supplies with conformally coated PC boards have been type tested according to IEC EN 60068-2-60 - Test Ke: Flowing mixed gas corrosion test. During the inspection after the exposure, no signs of corrosion have been detected.

Method	4
Gas composition SO ₂	200±20ppb
Gas composition H ₂ S	10±5ppb
Gas composition NO ₂	200±20ppb
Gas composition Cl ₂	10±5ppb
Temperature	55±2°C (131±3.6°F)
Relative humidity	75±5%
Test duration	21days

6.2 Salt mist

The power supplies with conformally coated PC boards have been type tested according to IEC 60068-2-11 - Test Ka: Salt mist. During the inspection after the exposure, no signs of corrosion have been detected.

Salt type	Sodium chloride
Purity	99.5%
Temperature	35°C (95°F)
Collection rate	1,6ml/h
Test duration	96h

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

| 13 / 25

7. Reliability and Service lifetime

Service lifetime	<i>min.</i>	15 000hrs	100V _{AC} , 100% P _{out_nom} , 40°C _{Camb} , 24/7
	<i>min.</i>	31 000hrs	120V _{AC} , 100% P _{out_nom} , 40°C _{Camb} , 24/7
	<i>min.</i>	64 000hrs	240V _{AC} , 100% P _{out_nom} , 40°C _{Camb} , 24/7
	<i>min.</i>	37 000hrs	100V _{AC} , 75% P _{out_nom} , 40°C _{Camb} , 24/7
	<i>min.</i>	67 000hrs	120V _{AC} , 75% P _{out_nom} , 40°C _{Camb} , 24/7
	<i>min.</i>	119 000hrs	240V _{AC} , 75% P _{out_nom} , 40°C _{Camb} , 24/7
	<i>min.</i>	44 000hrs	100V _{AC} , 100% P _{out_nom} , 25°C _{Camb} , 24/7
Early life MTBF Telcordia SR-332 Issue 4	<i>min.</i>	87 000hrs	120V _{AC} , 100% P _{out_nom} , 25°C _{Camb} , 24/7
	<i>min.</i>	183 000hrs	240V _{AC} , 100% P _{out_nom} , 25°C _{Camb} , 24/7
	<i>min.</i>	1.02M hrs	55°C _{Camb} , 50% P _{out_nom}
	<i>min.</i>	1.47M hrs	40°C _{Camb} , 50% P _{out_nom}
	<i>min.</i>	1.59M hrs	25°C _{Camb} , 50% P _{out_nom}
	<i>min.</i>	0.35M hrs	55°C _{Camb} , 100% P _{out_nom}
	<i>min.</i>	0.62M hrs	40°C _{Camb} , 100% P _{out_nom}
Service life MTBF Telcordia SR-332 Issue 4	<i>min.</i>	0.74M hrs	25°C _{Camb} , 100% P _{out_nom}
	<i>min.</i>	2.19M hrs	55°C _{Camb} , 50% P _{out_nom}
	<i>min.</i>	5.91M hrs	40°C _{Camb} , 50% P _{out_nom}
	<i>min.</i>	7.98M hrs	25°C _{Camb} , 50% P _{out_nom}
	<i>min.</i>	0.43M hrs	55°C _{Camb} , 100% P _{out_nom}
	<i>min.</i>	0.91M hrs	40°C _{Camb} , 100% P _{out_nom}
	<i>min.</i>	1.18M hrs	25°C _{Camb} , 100% P _{out_nom}

 The maximum service lifetime guaranteed by the eCap manufacturer is 131 400hrs (15 years). All values above are theoretically calculated.

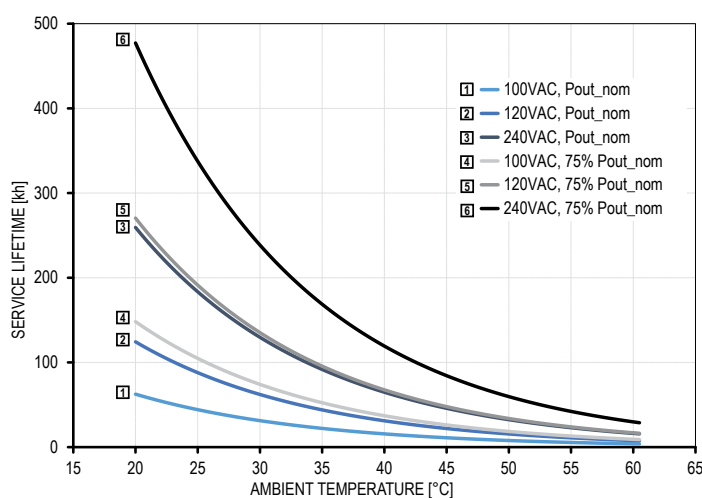


Fig. 16: Power supply expected service lifetime in dependence of ambient temperature

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

| 14 / 25

HELIOS
POWER SOLUTIONS

heliosps.com

Australia
sales-au@heliosps.com
+61 2 7200 9200

New Zealand
sales-nz@heliosps.com
+64 9 835 0700

Specifications subject to change.

Asia
sales@heliosps.asia
+65 6871 4140

Middle East
sales@heliosps.asia
+971 4 401 8484

8. Dimensions & Mechanical data

Enclosure material	Aluminum	
Cover material	Aluminum	
Inflammability class	V0	incl. connection terminals
UL 94		
Width	60mm (2.35in)	
Height	125mm (4.92in)	
Depth	129mm (5.08in)	w/o DIN rail
Built-in width	min. 80mm (3.15in)	
Built-in height	min. 285mm (11.22in)	
Weight	max. 900g (1.98lb)	
Lever arm	max. 50mm (1.97in)	into the direction of Y axis
Torsional moment on DIN rail	max. 0.44Nm (3.91lb in)	
Enclosure openings	max. 7mm (0.28in)	
DIN rail types	TH 35-7.5, TH 35-15	
IEC 60715		

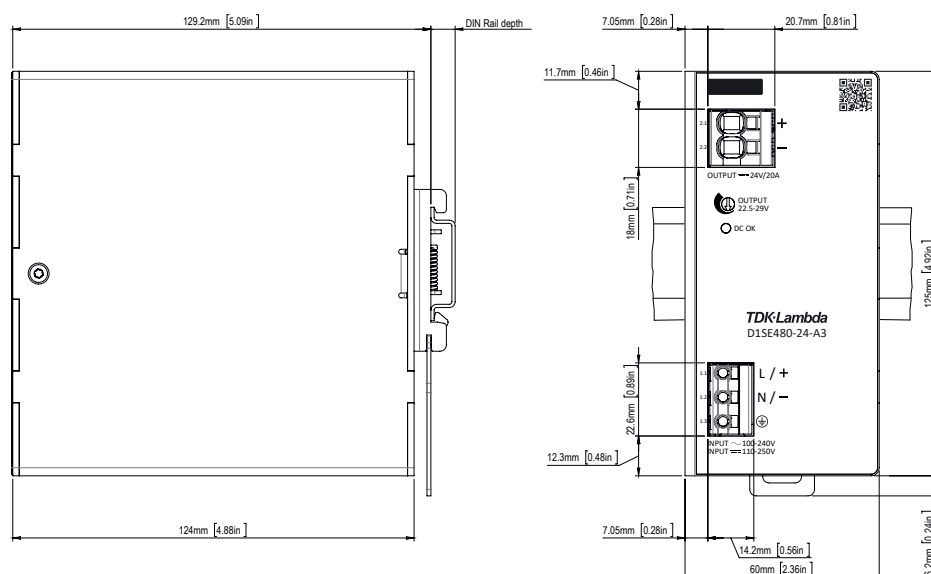


Fig. 17: Dimension drawing of D1SE480-24-A3

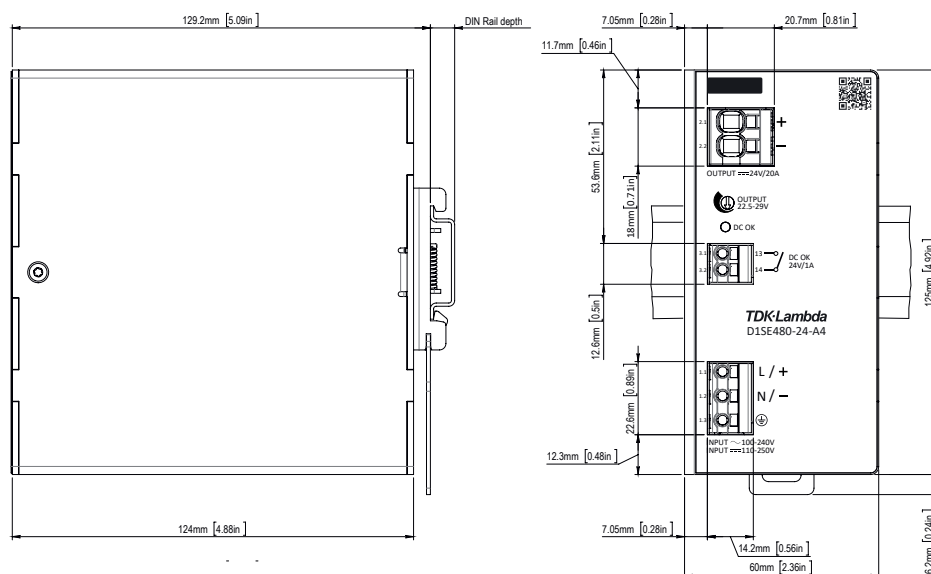


Fig. 18: Dimension drawing of D1SE480-24-A4/A5

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

15 / 25

9. Installation clearances

Vertically (Z axis)

Top side	1	min.	100mm (3.94in)
Bottom side	2	min.	60mm (2.35in)

installation above heat sources not permitted

Horizontally (X axis)

Left side / Right side	3a 4a	min.	60mm (2.35in)
Left side / Right side	3b 4b	min.	10mm (0.39in)

to heat sources (same power rating)
to passive components

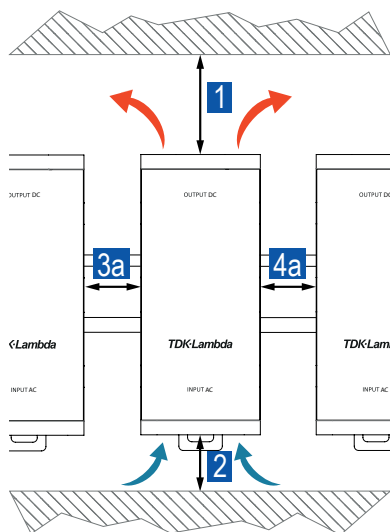


Fig. 19: Installation clearances to heat sources

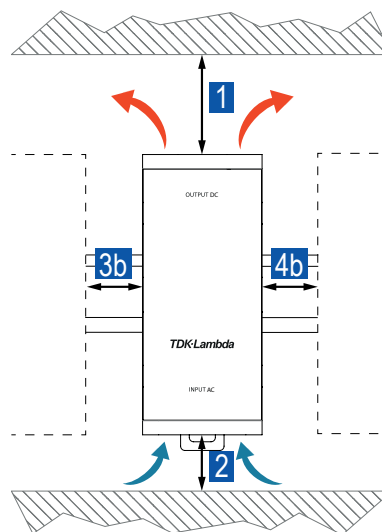


Fig. 20: Installation clearances to passive components

10. Wiring & Connection

	Input	Output	Signaling
Terminal type	Push-in	Push-in	Push-in
Recommended screw driver	SL 0.5x3.0mm (SL 1/64 x 1/8in)	SL 0.6x3.5mm (SL 1/32 x 9/64in)	SL 0.5x3.0mm (SL 1/64 x 1/8in)
Solid wire	0.2-4.0mm ² (26-12AWG)	0.2-10.0mm ² (24-8AWG)	0.2-4.0mm ² (26-12AWG)
Flexible wire	0.2-2.5mm ² (26-12AWG)	0.2-6.0mm ² (24-8AWG)	0.2-2.5mm ² (26-12AWG)
Insulated ferrules*	0.2-1.5mm ²	0.25-4.0mm ²	0.2-1.5mm ²
Uninsulated ferrules*	0.2-2.5mm ² (26-14AWG)	0.25-6.0mm ² (24-10AWG)	0.2-2.5mm ² (26-14AWG)
Stripping length	9-10mm (0.35 - 0.39in)	15mm (10.28in)	9-10mm (0.35 - 0.39in)

*The ferrules must be selected to match the stripping length.

i In compliance to IEC EN/UL 62368-1 (Ed.3) ferrules are required if flexible wires are used.

i In compliance with IEC EN/UL 61010-1, 61010-2-201 appropriate copper wires must be used that withstand operating temperatures of at least 75°C (167°F) in ambients NOT exceeding 40°C (104°F), and 90°C (194°F) in ambients exceeding 40°C (104°F).

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

| 16 / 25

11. Signaling & Control

DC OK

Type	Relay contact
Characteristic	N/O
Closing	$U_{out} > 90\% U_{set}$
Opening	$U_{out} < 80\% U_{set}$
Resistive load	<i>nom.</i> 1A
	<i>max.</i> 0.5A
Trigger hysteresis	<i>typ.</i> 0.6V

duration max. 13ms
duration max. 5ms
24V_{DC}
60V_{DC}

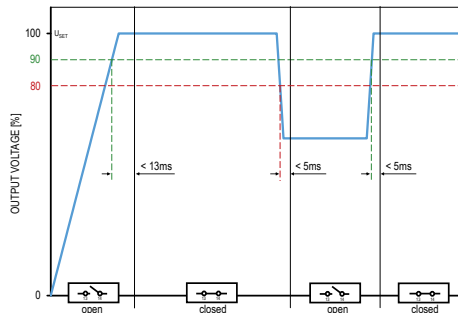


Fig. 21: DC-OK relay status in dependence of output voltage

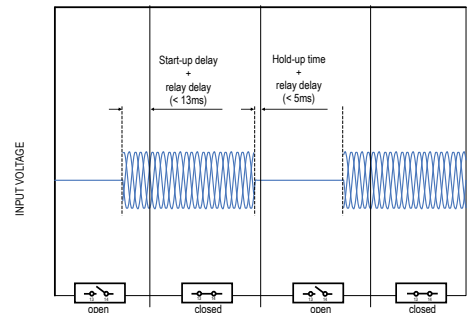


Fig. 22: DC-OK relay status in dependence of input voltage

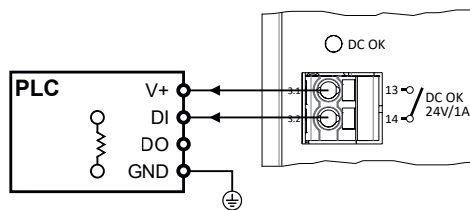


Fig. 23: Generic connection diagram of the DC OK relay contact

12. Block diagram

Active PFC	1	65 .. 82kHz	Dependent on U_{in} and I_{out}
Power stage	2	115 .. 208kHz	Dependent on U_{out} and I_{out}

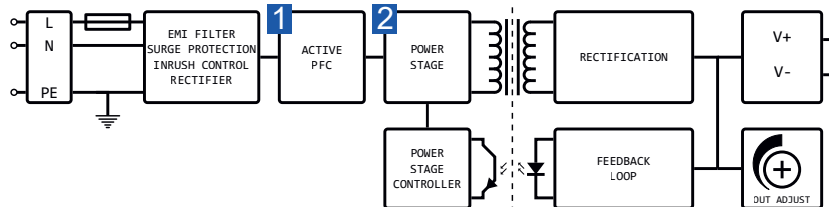


Fig. 24: Block diagram of -A3 models

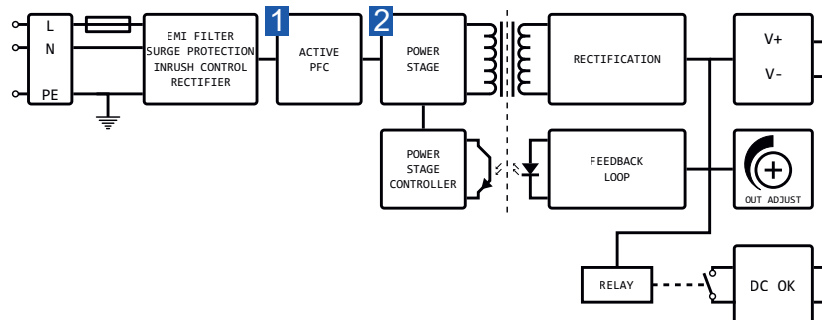


Fig. 25: Block diagram of -A4/-A5 models

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

| 17 / 25

13. Device protection

Ingress protection degree IEC 60529	IP 20	
NEMA classification NEMA 250-2018	NEMA 1	
Output overcurrent protection (OCP)	<i>min.</i>	23A, auto-recovery
Output overtemperature protection (OTP)		Yes, auto-recovery
Output overvoltage protection (OVP)	<i>max.</i>	33V _{DC} , auto-recovery
Undervoltage protection threshold (UVP)	<i>max.</i>	75V _{AC}
Integrated input fuse	8A at L pin	not DC capable, not user replaceable
Recommended DC fuse UL 248-1, UL 248-4	8A	
Recommended MCB types IEC 60898-1, UL 1077	B or C characteristic, 6/8/10A	
Transient protection	MOV	

 When installed in an end-product, the maximum branch circuit rating must not exceed 20A (IEC UL 62368-1 Ed.3). If the upstream supply provides a higher ampacity than 20A, an external protection device is required.

14. Electrical Safety

Class of protection IEC 61140	I	PE connection required
Electrical energy source classification IEC 62368-1	ES1	
Safety Extra Low Voltage IEC 61010-2-201, IEC 60950-1	SELV	
Protective Extra Low Voltage IEC 60204-1	PELV	Output must be earthed in the end application
Protective ground resistance	<i>max.</i>	42mΩ
Ground leakage current IEC 60990	<i>max.</i>	0.68mA <i>max.</i> 0.82mA
Touch current IEC 60990	<i>max.</i>	4μA <i>max.</i> 4μA
Overvoltage category IEC 61010-1, IEC 62368-1 (Ed.3)	II	<3000mASL (<9842ftASL)

14.1 Overvoltage category design

Underlying IEC standard	61010-1	62368-1 ¹	60950-1	61558-2-16 ²	62477-1	61204-7	60664-1
Mains transient voltage	II	II	III	II	III	III	III
Creepage & Clearance	III	II	III	II	III	III	III

¹ Edition 3

² not applicable along with IEC 61204-7

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

| 18 / 25

HELIOS
POWER SOLUTIONS

heliosps.com

Australia
sales-au@heliosps.com
+61 2 7200 9200

New Zealand
sales-nz@heliosps.com
+64 9 835 0700

Specifications subject to change.

Asia
sales@heliosps.asia
+65 6871 4140

Middle East
sales@heliosps.asia
+971 4 401 8484

14.2 Insulation strength

		Type test (60s) IEC 62368-1 IEC 61010-1	Routine test (3s) IEC 61010-1	Field test (3s)
Input / Output	A	5000V _{DC}	4000V _{DC}	4000V _{DC}
Input / PE	B	3100V _{DC}	3100V _{DC}	3100V _{DC}
Input / DC OK	C	3000V _{AC}		4000V _{DC}
Output / PE	D		750V _{DC}	750V _{DC}
Output / DC OK	E	860V _{AC}		750V _{DC}

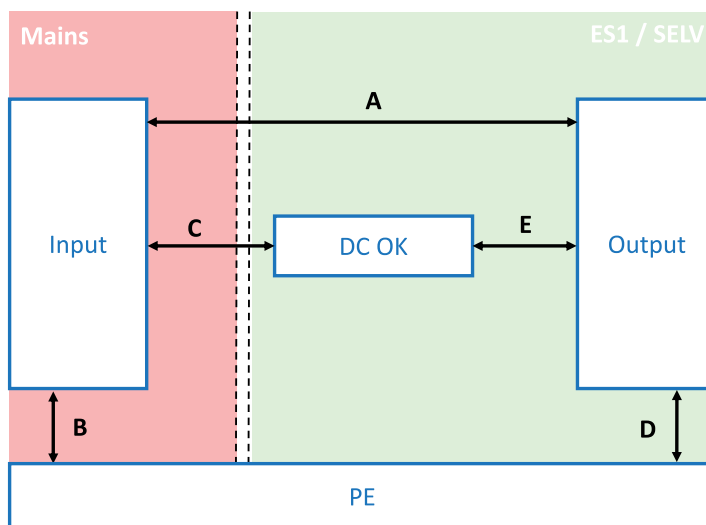


Fig. 26: Schematic of the insulation paths

14.3 HIPOT test

Apart from routine and type test, the end user might need to check the insulation strength during the final inspection and testing to guarantee the electrical safety of the end application. Therefore, a high potential test (HIPOT test) can be performed in the field. The following conditions must be observed:

- ▶ As every HIPOT test causes stress on the power supplies safety insulation, avoid frequent HIPOT testing or excessive test voltages
- ▶ The test voltages and durations, as indicated under „14.2 Insulation strength“ on page 19, must not be exceeded
- ▶ The test voltages rise and fall time should be between 2 and 4 seconds

i According to EN 60204-1 (Safety of machinery - Electrical equipment of machines), an individual HIPOT test of the power supply isn't required. During the HIPOT test of the end application, the power supply can be disconnected and only installed once the test has been completed.

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK·Lambda

| 19 / 25

15. Electromagnetic immunity

Investigated under generic standards IEC EN 61000-6-2 (2019) - Immunity for industrial environments.

Electrostatic contact discharge IEC EN 61000-4-2	4kV	Criterion A	330Ω / 150pF
Electrostatic air discharge IEC EN 61000-4-2	8kV	Criterion A	330Ω / 150pF
Electromagnetic RF field¹ IEC EN 61000-4-3	10V/m 3V/m	Criterion A Criterion A	80MHz..1GHz 1.4GHz..6GHz
Fast transients (burst) IEC EN 61000-4-4			
Input ²	2kV	Criterion A	5kHz or 100kHz
Output	1kV	Criterion A	5kHz or 100kHz
Signal contact ²	1kV	Criterion A	5kHz or 100kHz
Surge voltages IEC EN 61000-4-5			
Input symmetrical (L-L) ²	2kV	Criterion A	2Ω+18μF, for $\Phi = 0^\circ, 90^\circ, 180^\circ, 270^\circ$
Input asymmetrical (L-PE) ²	4kV	Criterion A	12Ω+9μF, for $\Phi = 0^\circ, 90^\circ, 180^\circ, 270^\circ$
Output symmetrical (L-L)	2kV	Criterion A	2Ω+18μF
Output asymmetrical (L-PE)	4kV	Criterion A	12Ω+9μF
Signal line asymmetrical (Signal-PE)	1kV	Criterion A	12Ω+9μF
Conducted disturbances IEC EN 61000-4-6			
Input, signal line, PE ³	10V	Criterion A	150kHz..80MHz
Power frequency magnetic field IEC EN 61000-4-8	30A/m	Criterion A	50Hz, 60s each axis (x, y, z)
Voltage dips/sags and interruptions IEC EN 61000-4-11, 61000-4-34			
	500ms	Criterion A	400V _{AC} at 70%, 50Hz
	200ms	Criterion A	400V _{AC} at 40%, 50Hz
	20ms	Criterion A	400V _{AC} at 0%, 50Hz
	5000ms	Criterion C	400V _{AC} at 0%, 50Hz
SEMI F47-0706	1000ms	Criterion A	400V _{AC} at 80%, 50Hz
	500ms	Criterion A	400V _{AC} at 70%, 50Hz
	200ms	Criterion A	400V _{AC} at 50%, 50Hz
	20ms	Criterion A	400V _{AC} at 0%, 50Hz

¹ Except for the ITU broadcast frequency bands 87..107MHz, 174..230MHz and 470..790MHz, where the level shall be 3V/m.

² Exceeds the requirements of the European Low Voltage Directive 2014/35/EU

³ Except for the ITU broadcast frequency bands 47..68MHz, where the level shall be 3V.

The electromagnetic immunity tests were additionally investigated under the following conditions.

Electrostatic contact discharge IEC EN 61000-4-2	8kV	Criterion A	330Ω / 150pF
Electrostatic air discharge IEC EN 61000-4-2	15kV	Criterion A	330Ω / 150pF
Electromagnetic RF field IEC EN 61000-4-3	30V/m	Criterion A	80MHz..1GHz
Fast transients (burst) IEC EN 61000-4-4			
Input	4kV	Criterion A	5kHz or 100kHz
Output	4kV	Criterion A	5kHz or 100kHz
Surge voltages IEC EN 61000-4-5			
Input symmetrical (L-L)	2kV	Criterion A	2Ω+18μF, for $\Phi = 0^\circ, 90^\circ, 180^\circ, 270^\circ$
Input asymmetrical (L-PE)	5kV	Criterion A	12Ω+9μF, for $\Phi = 0^\circ, 90^\circ, 180^\circ, 270^\circ$
Output symmetrical (L-L)	2kV	Criterion A	2Ω+18μF
Output asymmetrical (L-PE)	5kV	Criterion A	12Ω+9μF
Conducted disturbances IEC EN 61000-4-6			
Input, signal line, PE	20V	Criterion A	150kHz..80MHz
Power frequency magnetic field IEC EN 61000-4-8	1000A/m	Criterion A	50Hz, 60s each axis (x, y, z)

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

| 20 / 25

Damped oscillatory magnetic field immunity

IEC EN61000-4-10

Enclosure	100A/m	Criterion A	40/s at 0.1MHz and 400/s at 1MHz each axis (x, y, z)
-----------	--------	-------------	--

Damped oscillatory wave immunity

IEC EN61000-4-18

Input (L-L)	100A/m	Criterion A	±1kV open circuit, 40/s at 100kHz and 400/s at 1MHz, 2s burst duration
Input (L-PE)	100A/m	Criterion A	±2.5kV open circuit, 40/s at 100kHz and 400/s at 1MHz, 2s burst duration

i Performance level definitions:**Criterion A:**

The device continues operation as intended during and after the test. The specified performance level accepts a change of $\pm 10\%$ on nominal output voltage and current. There is neither a violation of the performance level, nor a loss of function if the device is used as intended.

Criterion B:

The device continues operation as intended after the test. The specified performance level accepts a change of $\pm 10\%$ on nominal output voltage and current. There is neither a violation of the performance level, nor a loss of function if the device is used as intended. During the test a violation of the performance level is allowed.

Criterion C:

A temporary loss of function is allowed, provided the function is auto-recoverable, or can be restored by the operation of the controls.

16. Electromagnetic emission

Investigated under generic standards IEC EN 61000-6-3 (2021) - Emission standard for residential, commercial and light-industrial environments.

Conducted noise emission input EN 55011, CISPR 11	Class B	150kHz .. 30MHz
Radiated noise emission input EN 55011, CISPR 11	Class B	30MHz .. 1GHz
Harmonic currents input IEC EN 61000-3-2	Class A	0kHz .. 2kHz
Total harmonic distortion (THD) input IEC EN 61000-3-2	16.7%	Order 1..40
Voltage changes, voltage fluctuations and flicker input IEC EN 61000-3-3	PASS	50Hz

17. Certifications & Approvals

UL 61010-1
CAN/CSA-C22.2 No. 61010-1

Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements

UL 61010-2-201
CAN/CSA-C22.2 No. 61010-2-201

Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 2-201: Particular requirements for control equipment
UL file: E356563

IEC EN 61010-1

Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements



IEC EN 61010-2-201

Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 2-201: Particular requirements for control equipment

IEC EN 62368-1 (Ed.3)

Audio/video, information and communication technology equipment - Part 1: Safety requirements

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK Lambda

17. Certifications & Approvals



UL 62368-1 (Ed. 3)

Audio/video, information and communication technology equipment -
Part 1: Safety requirements
UL file: E511889



IS 13252-1

Information technology equipment - Safety - Part 1: General
requirements
Reg. ID: R-41185469

18. Designed to meet

The safety design of the product complies additionally with the following standards.

UL 508	Industrial Control Equipment
IEC 60950-1	Information technology equipment - Safety - Part 1: General requirements
IEC EN 62477-1	Safety requirements for power electronic converter systems and equipment - Part 1: General
IEC EN 61204-3	Low-voltage switch mode power supplies - Part 3: Electromagnetic compatibility
IEC EN 61204-7	Low-voltage switch mode power supplies - Part 7: Safety requirements
IEC EN 61558-2-16	Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1100 V - Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units
EN 60204-1	Safety of machinery - Electrical equipment of machines - Part 1: General requirements
IEC EN 60068-2-60	Test Ke: Flowing mixed gas corrosion test
IEC 60068-2-11	Test Ka: Salt mist

19. Compliance & Registration



Conformity with health, safety, and environmental protection standards for products sold within the European Economic Area (EEA).



UKCA (UK Conformity Assessed) is the product marking that is used for certain goods being placed on the United Kingdom market.



The Waste Electrical and Electronic Equipment Directive (WEEE Directive) is the European Community Directive 2012/19/EU on collection, recycling and recovery targets for all types of electrical goods.



The Restriction of Hazardous Substances Directive 2011/65/EU (RoHS 2) regulates the use of certain hazardous substances in electrical and electronic equipment.

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

| 22 / 25



Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) is a European Union regulation that addresses the production and use of chemical substances, and their potential impacts on both human health and the environment.

20. Application notes

20.1 Parallel operation

In order to increase the output power, or to build up a 1+1 redundant system, it is possible to connect the power supplies in parallel. However, it should be noted that the power supplies themselves do not offer a parallel mode, or an integrated decoupling function. Therefore a decoupling module with an integrated load-sharing function is required. The products in the TDK-Lambda DRM series are recommended for this purpose (see "Add-ons and accessories" on page 3). The following measures must be taken into account:

- ▶ Only power supplies of the same series and power rating must be paralleled
- ▶ Load wiring shall be identical in terms of length and cross section
- ▶ The output voltage of the power supplies must be set to the same value
- ▶ The output voltage of each power supply should be checked and maintained in regular intervals
- ▶ All power supplies must be operated under the same ambient conditions
- ▶ The power supplies must not be operated under any condition which requires a power derating (e.g. altitudes above 3000mASL (9842ftASL), temperatures above 55°C_{amb} (131°F_{amb}), mounting orientations others than the normal mounting position, etc.)
- ▶ The increased installation distances must be taken into account when installing the power supplies side by side (see "Installation clearances" on page 16)

i In parallel operations the values of output load regulation, inrush currents, EMI, harmonic and leakage currents will increase.

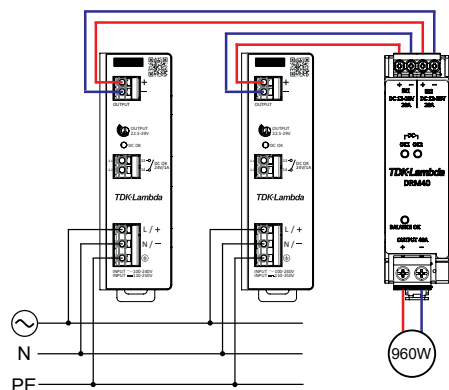


Fig. 27: Connection scheme of power supplies in parallel for the purpose of output power increase

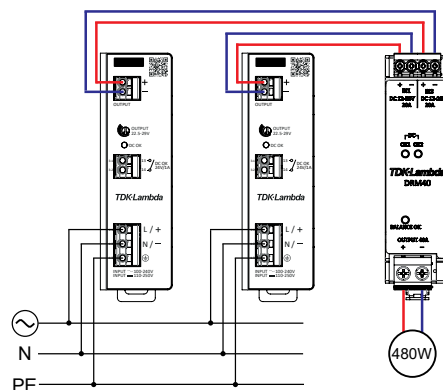


Fig. 28: Connection scheme of power supplies in parallel for the purpose of a 1+1 redundancy

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.

TDK-Lambda

| 23 / 25

account:

- ▶ The output voltage sum must not exceed 250V_{DC}
- ▶ If the output voltage sum exceeds 60V_{DC}, a safeguard against unintended touching must be considered
- ▶ Only power supplies of the same series and power rating must be connected in series
- ▶ All power supplies in series must be operated under the same ambient conditions
- ▶ The power supplies must not be operated under any condition which requires a power derating (e.g. altitudes above 3000mASL (9842ftASL), temperatures above 55°C_{amb} (131°F_{amb}), mounting orientations others than the normal mounting position, etc.)
- ▶ The increased installation clearances must be considered (refer to chapter "Installation clearances" on page 16)

i In series operations the values of output load regulation, inrush currents, EMI, harmonic and leakage currents will increase.

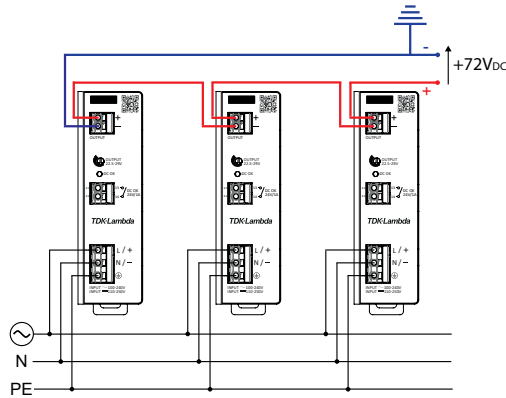


Fig. 29: Connection scheme for series operation with positive voltage level

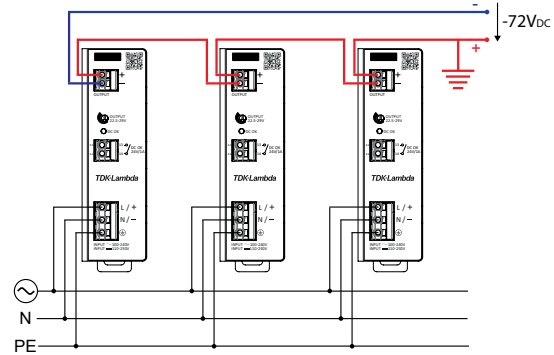


Fig. 30: Connection scheme for series operation with negative voltage level

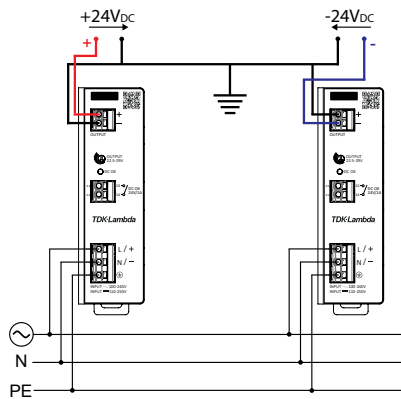


Fig. 31: Connection scheme for series operation with centre tap

Unless otherwise stated, all values are specified in normal mounting position, at full load, nominal input and output voltages, 25°C (77°F) ambient temperature and a run-in time of 5 minutes.